

# nifty

# SD64

## SELF DRIVE WORK PLATFORM



**69ft 7in (21.20m)**

Working height

**43ft 4in (13.20m)**

Working outreach

**4 Wheel Drive Available**

Maximum traction  
over rough terrain

**4 Wheel Steer Available**

Superior maneuverability on site

**Independent Suspension  
Available**

For fast comfortable  
movement on site

**Platform Rotation  
& Flyboom**

Improved access to applications

**Turf Tires Available**

For minimal disruption to  
sensitive grass surfaces



[niftylift.com](http://niftylift.com)




# nifty SD64

The Nifty SD64 is the ultimate combination of our trailer mounted and self propelled product ranges. With the option of full independent suspension and 4 wheel drive, the SD64 can cope with a wide range of working environments and still offers the same impressive reach as the TM64. Low weight design makes it economical and quick to transport and the 4 wheel steer option gives the operator enormous flexibility to maneuver once on site. Excellent gradeability coupled with a good travel speed allow the SD64 to be positioned and set up quickly, allowing the operator to spend more of their time working.

## SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible & Visual Alarms
- Lock Valves on all Hydraulic Cylinders
- Dual Controls (Platform & Base)
- Manual Recovery with Hand-Pump
- Meets OSHA and ANSI Regulations

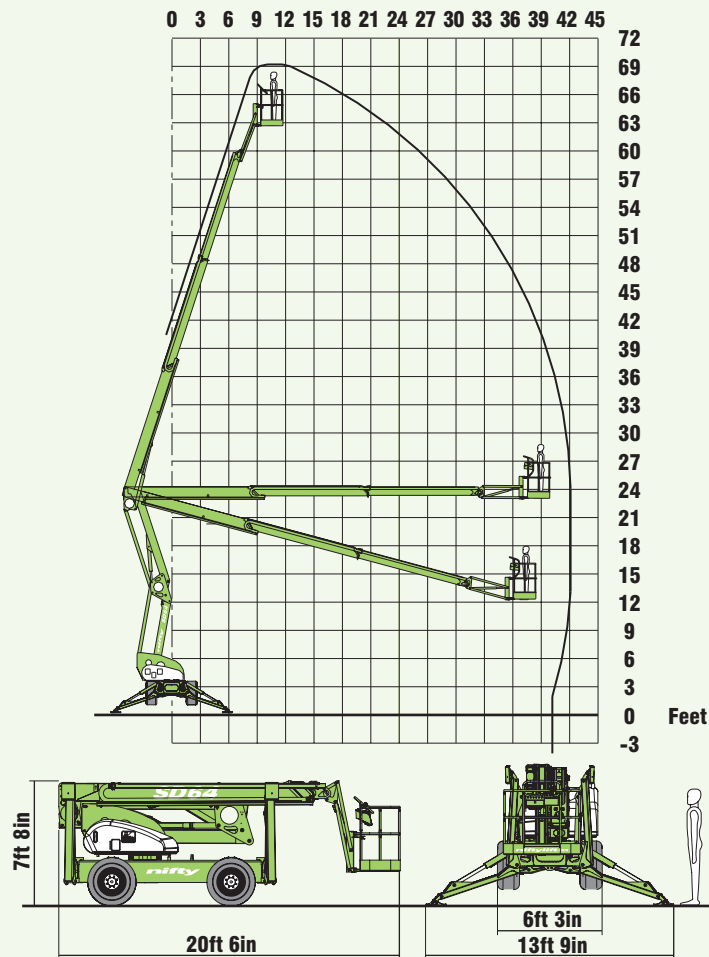

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The extra maneuverability available from the 4 wheel steer option coupled with the special "Turf Tires" make the SD64 ideal for working on sensitive surfaces such as grass.

## SPECIFICATIONS

<b>Height - Working</b>	69ft 7in	21.20m
<b>Height - Platform</b>	63ft	19.20m
<b>Outreach - Working</b>	43ft 4in	13.20m
<b>Slew</b>	360°	
<b>Flyboom Arc</b>	150°	
<b>Width - Traveling</b>	6ft 3in	1.90m
<b>- Working</b>	13ft 9in	4.20m
<b>Height - Stowed</b>	7ft 8in	2.35m
<b>Length - Overall</b>	20ft 6in	6.25m
<b>Weight</b>	8,250lbs - 9,350lbs*	3,750kg - 4,250kg*
<b>Turning Radius - Inside</b>	7ft 5in	1.50m
<b>- Outside</b>	17ft	3.50m
<b>Platform Rotation</b>	100°	
<b>Platform Capacity</b>	500lbs	225kg
<b>Platform Size</b>	3ft 8in x 2ft 1in	1.34m x 0.67m
<b>Drive Speed</b>	6.3mph	10kph
<b>Gradeability</b>	35%	
<b>Control System</b>	Fully proportional hydraulic	
<b>Power System</b>	Kubota 722 18Hp - 2WD Kubota 1505 32Hp - 4WD	

\* Weights may vary according to specification / power options, please confirm before ordering.

## Supplied by:

## Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

### NIFTYLIFT INC

825 North Driveway,  
Glen Ellyn IL, 60137-5726, USA  
Tel.: 1-800-NIFTYLIFT  
Tel.: 1-630-858-0822  
Fax: 1-630-858-0520  
e.mail: aeriallift@aol.com

### NIFTYLIFT LTD

Fingle Drive, Stonebridge  
Milton Keynes, MK13 0ER  
England, United Kingdom  
Tel.: +44 (0)1908 223456  
Fax: +44 (0)1908 312733  
e.mail: info@niftylift.com

www.niftylift.com