

nifty



TM34

TRAILER MOUNTED WORK PLATFORM



40ft 5in (12.33m)

Working height

16ft 8in (5m)

Working outreach

**Fully Proportional
Hydraulic Controls**

Simple, reliable & easy to maintain

Bi-Energy Available

Optimizing utilization

Weight Saving Design

Easily towed &
maneuvered on site

**Hydraulic Outriggers
Available**

For quick & easy setup

Telescopic Axles

Access through double
doorway openings



niftylift.com





nifty TM34

The Nifty TM34 is one of the most robust and versatile trailer mounts available. Its telescopic axles allow it to pass through double doorway openings and setting up is simple with a choice of manual or hydraulic outriggers. Operation is quick and easy and its reliable hydraulic controls make it an ideal alternative to ladders and scaffolds.

SAFETY FEATURES


- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- Meets OSHA and ANSI regulations

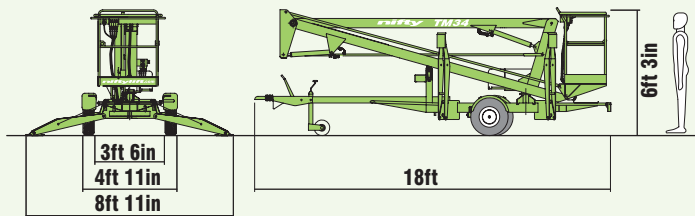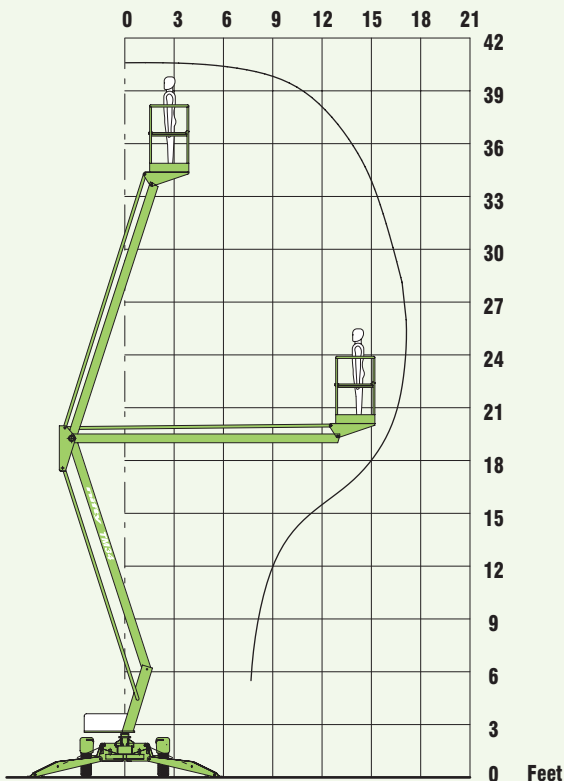

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



Retractable axles allow the TM34 to pass through a 3ft 6in (1.10m) wide opening.

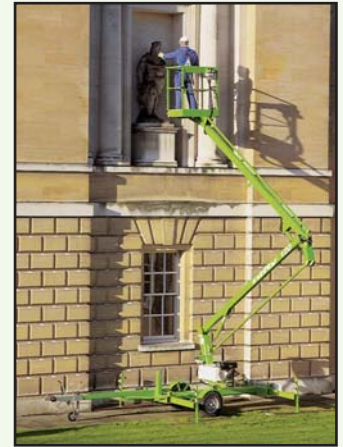

The TM34's manual outriggers are both cost effective and simple to set up.



To save time and energy when setting up, the TM34 is also available with a hydraulic outrigger option.

SPECIFICATIONS

Working Height	40ft 5in	12.33m
Platform Height	33ft 10in	10.33m
Working Outreach	16ft 8in	5m
Slew	360°	
Width - Traveling	4ft 11in	1.50m
- Working	8ft 11in	2.70m
- Axles Retracted	3ft 6in	1.10m
Height - Overall	6ft 3in	1.90m
Length - Overall	18ft	5.50m
Weight	2,252lbs*	1,160kg*
Platform Capacity	500lbs	225kg
Platform Size	3ft 8in x 2ft 1in	1.10m x 0.65m
Control System	Fully Proportional Hydraulic	
Power System	Mains Only Battery Only Gas or Diesel Only Bi-Energy (engine & battery)	

* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT INC

825 North Driveway,
Glen Ellyn IL, 60137-5726, USA
Tel.: 1-800-NIFTYLIFT
Tel.: 1-630-858-0822
Fax.: 1-630-858-0520
e.mail: aeriallift@aol.com

NIFTYLIFT LTD

Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733
e.mail: info@niftylift.com

www.niftylift.com